



# SmartOTDR™ 100A/B Series

The affordable, easy-to-use handheld tester for techs at any level

The lightweight and compact SmartOTDR speeds and optimizes field testing of metro and access networks—with a tailored OTDR interface and automatic analysis that any technician can understand.

With SmartOTDR, generic or user-defined setup configurations eliminate setup errors and maintain results consistency. One-touch operation and a single results window ensure fast and easy measurements, while robust wireless connectivity options increase productivity anywhere.




### Key Benefits

- Combines all essential fiber tests in one handheld with visual fault locator (VFL), optical power meter (OPM), and P5000i microscope options
- Simplifies OTDR analysis with Smart Link Mapper (SLM) option
- Upgrades easily in the field
- Automates testing with objective, pass/fail results
- Enhances productivity anywhere with powerful network connectivity options

### Key Features

- Single-/dual-/tri-wavelength versions with 1310/1550 nm and in-service 1625 or 1650 nm wavelengths
- Light, compact, hands-free design includes 5" high-visibility outdoor touch screen
- Integrated CW light source
- PON optimized to test through a 1x128 splitter
- Built-in PON/XG-PON power meter (1490/1550/1578 nm)
- Automated fiber inspection and macrobend detection with pass/fail analysis software
- 3G/4G connectivity via USB, Bluetooth®/WiFi options
- 3-year warranty
- All-day battery life

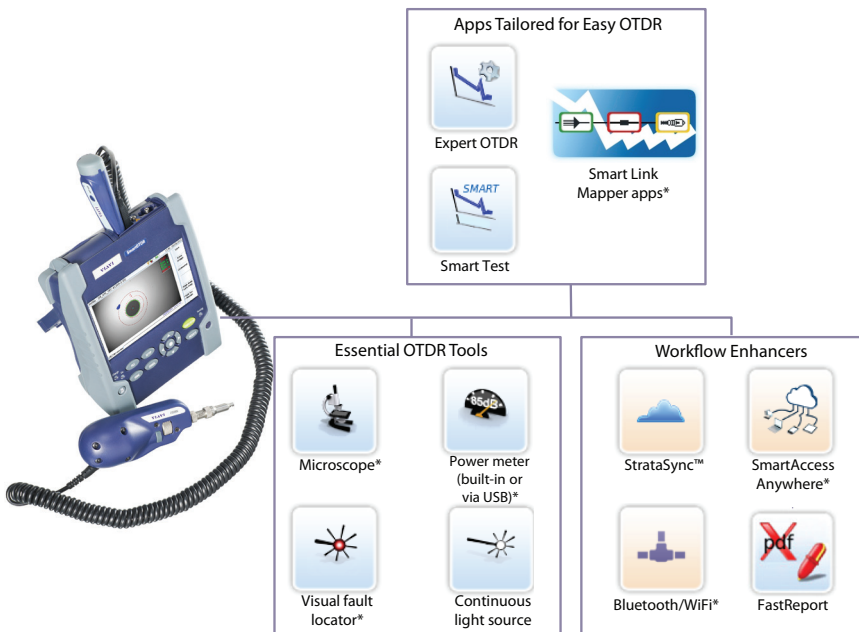


\* Optional

## Powerful Connectivity

Several connectivity options (3G/4G smartphones via USB and optional Bluetooth/WiFi) enable remote control as well as data and work-order transfers to-and-from tablets, smartphones, and computers. The SmartOTDR quickly resolves field issues in real time, and optional SmartAccess Anywhere (SAA) can open a tunnel in the cloud so a technician can remotely access and operate the instrument. Compatible with a wide range of cloud servers (WebDAV service providers), the SmartOTDR can also instantly share measurement reports using onboard FastReport .pdf report generation.

SmartOTDR includes a one-year trial of cloud-based StrataSync™ for asset, configuration, and test-data management, and to ensure that all instruments have the latest software and options installed.

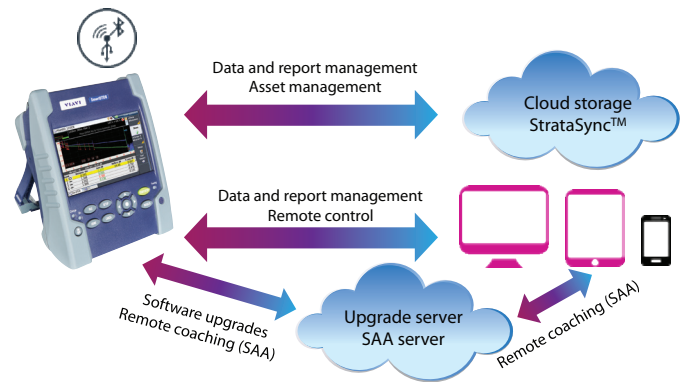

Connectivity features and options enhance workflows



- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>1. 5-inch high-visibility capacitive touch screen</li> <li>2. Charge indicator</li> <li>3. On indicator</li> <li>4. File menu</li> <li>5. Setup menu</li> <li>6. Start/Stop</li> <li>7. Testing indicator</li> <li>8. On/Off</li> <li>9. Home page</li> <li>10. Cancel (switch off functions)</li> </ul> | <ul style="list-style-type: none"> <li>11. Direction and validation keys</li> <li>12. Results page</li> <li>13. Loudspeaker</li> <li>14. AC/DC input</li> <li>15. Slave mini USB port</li> <li>16. Visual fault locator (VFL)</li> <li>17. Master USB ports</li> <li>18. OTDR port/continuous light source/power meter</li> <li>19. OTDR live port (in-service test)/PON/XG-PON power meter</li> <li>20. WiFi or Bluetooth options</li> </ul> |
|---|---|

## Specifications (typical at 25°C)

| General   |   |                                       |
|---|---|---------------------------------------|
| Display   | 5-inch capacitive color touch screen (12.5 cm)  |                                       |
| Display resolution                                    | 800 x 480 W VGA   |                                       |
| Interfaces  | 2x USB 2.0 ports, 1x mini-USB 2.0 port, built-in Bluetooth and WiFi (optional, dongles also available)                            |                                       |
| Storage   | 10,000 OTDR traces typical  |                                       |
| Battery   | Rechargeable Lithium-polymer battery, up to 20 hours of operation <sup>1</sup>  |                                       |
| Power supply  | AC/DC adapter, input 100-250 V AC, 50-60 Hz; 2.5 A max, output 12 V DC, 25 W  |                                       |
| Electrical safety                                     | EN60950 compliant   |                                       |
| Size (HxWxD)  | 175 x 138 x 57 mm (6.9 x 5.4 x 2.24 in)   |                                       |
| Weight (battery included)                             | Approx. 0.9 kg (1.98 lb)  |                                       |
| Operating/storage temperature                         | Operating: -20 to +50°C; storage: -20 to +60°C  |                                       |
| Humidity (noncondensing)                              | 95%   |                                       |
| OTDR  |   |                                       |
| Laser safety class (21 CFR)                           | Class 1   |                                       |
| Number of data points                                 | Up to 256,000 data points   |                                       |
| Display range   | 0.1 km to 260 km  |                                       |
| Sampling resolution                                   | 4 cm  |                                       |
| Distance accuracy                                     | $(\pm 1 \text{ m}) \pm (\text{sampling resolution}) \pm (1.10^{-5} \times \text{distance})$ , excluding group index uncertainties |                                       |
| Attenuation resolution                                | 0.001 dB  |                                       |
| Attenuation linearity                                 | $\pm 0.04 \text{ dB/dB}$  |                                       |
|   | SmartOTDR 100A  | SmartOTDR 100B                        |
| Central wavelength <sup>2</sup>                       | 1310/1550/1650 nm $\pm 20 \text{ nm}$   | 1310/1550/1625 nm $\pm 20 \text{ nm}$ |
| RMS dynamic range <sup>3</sup>                        | 37/35/32 dB   | 40/40/41 dB                           |
| Pulse widths  | 5 ns to 20 $\mu\text{s}$  | 3 ns to 20 $\mu\text{s}$              |
| Event dead zone <sup>4</sup>                          | 1.35 m  | 0.9 m                                 |
| Attenuation dead zone <sup>5</sup>                    | 4 m   | 2.5 m                                 |
| Splitter attenuation dead zone                        | Not available   | 45 m after 15 dB splitter loss        |
| CW Light Source                                       |   |                                       |
| Output power level <sup>6</sup>                       | -3.5 dBm  |                                       |
| Stability long term (8 hr) <sup>7</sup>               | $\pm 0.05 \text{ dB}$   |                                       |
| Built-in Power Meter (optional)                       |   |                                       |
| Operating mode  | 270, 330, 1 kHz, 2 kHz, and TWINTest  |                                       |
| Power level range                                     | 0 to -55 dBm  |                                       |
| Calibrated wavelengths                                | 1310, 1490, 1550, 1625, and 1650 nm   |                                       |
| Measurement accuracy <sup>8</sup>                     | $\pm 0.5 \text{ dB}$  |                                       |
| Built-in Visual Fault Locator (optional)              |   |                                       |
| Wavelength  | 650 nm  |                                       |
| Emission mode   | CW, 1 Hz  |                                       |
| Laser class   | Class 2 per EN60825-1 and FDA21 CFR Part 1040.10 standards  |                                       |
| Built-in PON/XG-PON Power Meter (E118FA65PPM version) |   |                                       |
| Wavelengths   | 1490/1550 nm; 1490/1578 nm  |                                       |
| Measurement ranges                                    | 1490 nm: -35 to +5 dBm; 1550/1578 nm: -35 to +23 dBm  |                                       |
| Measurement accuracy                                  | $\pm 0.5 \text{ dB}$  |                                       |

1. Per Telcordia GR-196-CORE.

2. Laser at 25°C and measured at 10  $\mu\text{s}$ .

3. The one-way difference between the extrapolated backscattering level at the start of the fiber and the RMS (SNR=1) noise level, after 3 minutes of averaging using the largest pulsewidth.

4. Measured at  $\pm 1.5 \text{ dB}$  below the peak of an unsaturated reflective event using the shortest pulse width.

5. Measured at  $\pm 0.5 \text{ dB}$  from the linear regression using a FC/UPC-type reflectance and the shortest pulse width.

6.  $\pm 1 \text{ dB}$ .

7. After light source stabilization, warm-up time of 20 min.

8. At calibrated wavelengths and at -30 dBm.

## Ordering Information

| SmartOTDR Configurations   | Part Number      |
|--|------------------|
| <b>All configurations include a hands-free soft case with neck strap and a stylus for the capacitive touch screen.</b> |                  |
| SmartOTDR filtered 1650 nm A-range handheld tester with APC connector  | E118FA65-APC     |
| SmartOTDR filtered 1650 nm A-range handheld tester with PON-XGPON (1490/1550/1578 nm) power meter and APC connector    | E118FA65PPM-APC  |
| SmartOTDR 1310/1550 nm A-range handheld tester with PC or APC connector  | E126A-PC/-APC    |
| SmartOTDR 1310/1550/filtered 1650 nm A-range handheld tester with PC or APC connector*                                 | E138FA65-PC/-APC |
| SmartOTDR 1310/1550 nm B-range handheld tester with PC or APC connector  | E126B-PC/-APC    |
| SmartOTDR 1310/1550 nm and filtered 1625 nm B-range handheld tester with PC or APC connector*                          | E136FB-PC/-APC   |
| <b>OTDR Connector Adapters</b>   |                  |
| SC universal adapter   | EUSCADS          |
| FC universal adapter   | EUFCADS          |
| LC universal adapter   | EULCADS          |
| <b>Batteries</b>   |                  |
| AA battery pack (tray + batteries)   | E10DRYBAT        |
| Lithium polymer battery  | E10LIPO          |
| <b>Accessories</b>   |                  |
| Hands-free soft case with neck strap   | E10GLOVE         |
| Stylus for capacitive touch screen   | EHVT-STYLUS      |
| Large soft carrying case (optional)  | E40SCASE1        |
| 12 V car lighter adapter (optional)  | E40LIGHTER       |
| EU/US-to-India type D power adapter (optional)   | EINDIADPLUG      |
| <b>Optional Tools and Firmware Apps</b>  |                  |
| VFL with 2.5 mm UPP adapter  | E10VFL           |
| Optical power meter option (same port as OTDR)   | E10PM            |
| MP-60 USB optical power meter with 2.5 and 1.25 mm UPP adapters  | MP-60A           |
| MP-80 USB high-power optical power meter with 2.5 and 1.25 mm UPP adapters   | MP-80A           |
| P5000i digital microscope kit with 7 tips  | ESDFSCOPE5KI     |
| Built-in WiFi  | E10WIFI          |
| Built-in Bluetooth   | E10BLUE          |
| External WiFi USB dongle   | E60EWIFI         |
| External Bluetooth USB dongle  | E60EBLUE         |
| FTTA-SLM   | ESMARTFTTA-100   |
| FTTH-SLM   | ESMARTFTTH-100   |
| SLM  | ESMARTLINK-100   |
| CABLE-SLM  | ESMARTCABL-100   |
| SmartAccess Anywhere   | SAA-100-L2       |

\* Available with SC OTDR connector adapter (EUSCADS) only.



Contact Us **+1 844 GO VIAVI**  
(+1 844 468 4284)

To reach the Viavi office nearest you,  
visit [viavisolutions.com/contacts](http://viavisolutions.com/contacts).

© 2016 Viavi Solutions Inc.  
Product specifications and descriptions in this  
document are subject to change without notice.  
smartotdr-ds-fop-nse-ae  
30176148 902 0516