



# Agilent E7400 A-Series EMC Analyzers, EMI Measurement Software, and Precompliance Systems

Ordering Information

**Agilent E7401A, E7402A, E7403A,  
E7404A, E7405A, E7415A, E7416A,  
84105EM, and 84115EM**



## General Description

Early evaluation of your design's EMI performance is essential for a successful product. Whether your industry is information technology, communications, automotive, medical, or industrial equipment, your product must comply with EMC requirements before it can be introduced to the marketplace.

With Agilent Technologies' EMC precompliance solution, you get all the features that make in-house EMC precompliance testing a simple reality:

- Preprogrammed, automated measurements that require no special knowledge or training, so you can begin making EMC measurements as soon as your EMC analyzer arrives.
- Interactive software that allows you to perform tests from your PC, or capture measurements made directly from the front panel.
- Automatic remeasure functions for consistent, repeatable results.




**Agilent Technologies**

Innovating the HP Way

© Keysight Technologies

Reproduced with Permission, Courtesy of Keysight Technologies

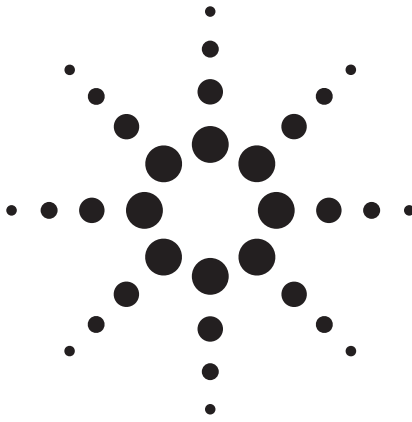

# Agilent E7400 A-series EMC Analyzers

## Data Sheet

These specifications apply to the Agilent Technologies E7402A and E7405A EMC analyzers.

### Frequency Specifications

#### Frequency range

##### E7402A

dc coupled	30 Hz <sup>1</sup> to 3.0 GHz
ac coupled	100 kHz <sup>1</sup> to 3.0 GHz

##### E7405A

Band	LO harmonic = N	
0	1-	dc coupled 30 Hz <sup>1</sup> to 3.6 GHz ac coupled 100 MHz to 3.6 GHz
1	1-	2.85 GHz to 6.7 GHz
2	2-	6.2 GHz to 13.2 GHz
3	4-	12.8 GHz to 19.2 GHz
4	4-	18.7 GHz to 26.5 GHz

#### Frequency reference


Aging	$\pm 1 \times 10^{-7}$ /year
Temperature stability	$\pm 1 \times 10^{-8}$
Settability	$\pm 1 \times 10^{-8}$

#### Frequency readout accuracy

(start, stop, center, marker)  $\pm$ (frequency indication  
x frequency reference error<sup>2</sup>  
+ span accuracy + 15% of RBW  
+ 10 Hz) + 1 Hz x N<sup>3</sup>

### Specifications

All specifications apply over 0 °C to +55 °C unless otherwise noted and are covered by the product warranty. The analyzer will meet its specifications when: it's within the one year calibration cycle, AUTO ALIGN [ALL] is selected, stored a minimum 2 hours within the operating temperature range, turned on for at least 5 minutes, and Align Now RF has been run once every 24 hour period. Typical performance describes the level at which 80% of the units will meet or exceed with a 95% confidence level over 20 to 30 °C, but is not covered in the product warranty. Characteristics describe expected product performance levels that are not covered in the product warranty.

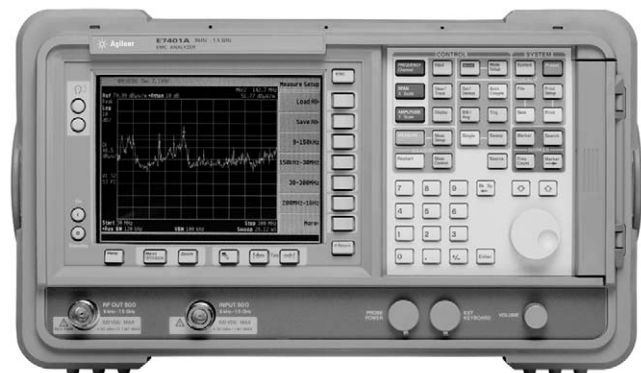

1. Characteristic

2. Frequency reference error = (aging rate x period of time since adjustment + settability + temperature stability

3. N = LO harmonic mixing mode

### Marker frequency counter<sup>1</sup>

Accuracy<sup>2</sup>  $\pm(\text{marker frequency} \times \text{frequency reference error}^3 + \text{counter resolution})$   
 Counter Resolution Selectable from 1 Hz to 100 kHz

### Frequency span

Range 0 Hz (zero span), 100 Hz x N<sup>4</sup> to the range of the spectrum analyzer  
 Resolution 2 Hz x N<sup>4</sup>  
 Accuracy(> 2000 sweep points)  
 Sweep type linear  $\pm 0.5\%$  of span  
 Sweep type log  $\pm 2\%$  of span (characteristic)

### Sweep time

Range  
 Span > 0 Hz 1 ms to 4000 s  
 Span = 0 Hz 50 ns<sup>5</sup> to 4000 s  
 Accuracy  $\pm 1\%$   
 Sweep trigger Free run, single, line, video, external, delay, offset, and gate (Option 1D6)  
 Delay trigger range 1  $\mu$ s to 400 s

### Sweep (trace) point range

101 to 8192  
 Span = 0 Hz 2 to 8192

**Resolution bandwidth** 1 Hz to 3 MHz (-3 dB) in 1-3-10 sequence<sup>6</sup>  
 5 MHz (-3 dB) bandwidth  
 200 Hz<sup>6</sup>, 9 kHz, 120 kHz, 1 MHz (-6 dB) EMI bandwidths  
 1 MHz (impulse) EMI bandwidth

### Accuracy

1 Hz to 300 MHz (-3 dB)  $\pm 10\%$   
 1 kHz to 3 MHz (-3 dB)  $\pm 15\%$   
 5 MHz (-3 dB)  $\pm 30\%$   
 200 Hz (-6 dB)  $\pm 10\%$   
 9 kHz to 120 kHz (-6 dB)  $\pm 20\%$   
 1 MHz (-6 dB)  $\pm 10\%$   
 1 MHz (impulse)  $\pm 15\%$


### Selectivity (characteristic)

10 Hz to 300 Hz (-3 dB) < 5:1 (-60 dB/-3 dB) (Digital, approximately Gaussian-shaped)  
 1 kHz to 3 MHz (-3 dB) < 5:1 (-60 dB/-3 dB) (approximately Gaussian-shaped)  
 200 Hz (-6 dB) < 3:1 (-40 dB/-6 dB) (Digital, Kaiser Windows)  
 9 kHz, 120 kHz, 1 MHz (-6 dB) < 10:1 (-60 dB/-6 dB) (approximately Gaussian-shaped)  
 1 MHz (impulse) < 10:1 (-60 dB/-6 dB) (approximately Gaussian-shaped)

**Video bandwidth range** 30 Hz to 3 MHz<sup>7</sup> in 1-3-10 sequence  
 1, 3, 10 Hz for RBW's < 1 kHz

### Stability

Noise sidebands (1 kHz RBW, 30 Hz VBW and sample detector)

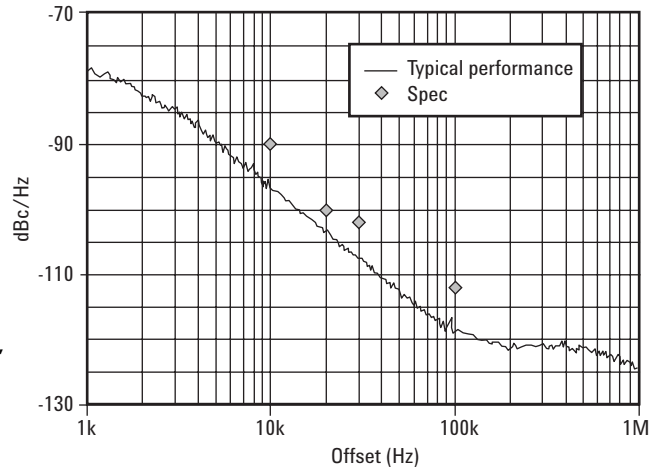

### Stability specifications

	Specified	Typical
$\geq 1$ kHz	na	-78 dBc/Hz <sup>8</sup>
$\geq 10$ kHz	$\leq -90$ dBc/Hz <sup>8</sup>	-94 dBc/Hz <sup>8</sup>
$> 20$ kHz	$\leq -100$ dBc/Hz <sup>8</sup>	-105 dBc/Hz <sup>8</sup>
$> 30$ kHz	$\leq -106$ dBc/Hz <sup>8</sup>	-112 dBc/Hz <sup>8</sup>
$> 100$ kHz	$\leq -118$ dBc/Hz <sup>8</sup>	-122 dBc/Hz <sup>8</sup>
$> 1$ MHz	$\leq -125$ dBc/Hz <sup>8</sup>	-127 dBc/Hz <sup>8</sup>
$> 5$ MHz	$\leq -127$ dBc/Hz <sup>8</sup>	-129 dBc/Hz <sup>8</sup>
$> 10$ MHz	$\leq -131$ dBc/Hz <sup>8</sup>	-136 dBc/Hz <sup>8</sup>

### Residual FM

1 kHz RBW, 1 kHz VBW  $\leq 100 \times N^4$  Hz pk-pk in 100 ms  
 10 Hz RBW, 10 Hz VBW  $\leq 2 \times N^4$  Hz pk-pk in 20 ms

### System-related sidebands

$\geq 30$  kHz offset from CW signal  $\leq -65$  dBc + 20 Log N<sup>4</sup>

- Not available in RBW < 1kHz
- Marker level to DANL > 25 dB, Span  $\leq 1.5$  GHz, RBW/Span  $\geq 0.002$
- Frequency reference error = (aging rate x period of time since adjustment + settability + temperature stability)
- N = LO harmonic mixing mode
- RBW  $\geq 1$  kHz, 2 sweep points
- 1 Hz to 300 Hz are only available in spans of  $\leq 5$  MHz. This bandwidth is not usable when the tracking generator is turned on (Option 1DN).
- Characteristic
- Add 20 log(N) for frequencies > 6.7 GHz.

## Amplitude specifications

### Amplitude range

Measurement range	Displayed average noise level (DANL) to maximum safe input level
Input attenuator range	
E7402A	0 to 65 dB (75 dB <sup>1</sup> ), in 5 dB steps
E7405A	0 to 65 dB, in 5 dB steps

### Maximum safe input level

Average continuous power	+30 dBm (1 W)
Peak pulse power	+50 dBm (100 W) (input attenuator ≥ 30 dB)
Maximum dc	0 Vdc (dc coupled) 50 V (ac coupled)

### 1 dB gain compression (total power at input mixer<sup>2</sup>)

≥ 50 MHz	0 dB
≥ 6.7 GHz	-3 dB
≥ 13.2 GHz	-5 dB

## Display range

Log Scale	0.1, 0.2, 0.5 dB/division and 1 to 20 dB/division in 1 dB steps; ten divisions displayed
RBW ≥ 1kHz	0 to -85 dB from reference level is calibrated
RBW ≤ 300 Hz	0 to -120 <sup>5</sup> dB from reference level is calibrated
Linear scale	10 divisions
Scale units	dBm, dBmV, dBμV, dBμA, Amps, Volts and Watts

## Marker readout resolution

Log scale		
0 to -85 dB		0.04 dB
0 to -120 (RBW ≤ 300 Hz)		0.04 dB
Linear scale		0.01% of reference level

### Fast sweep times for zero span (Option AYY)

Log Scale, 0 to -85 dB	0.3 dB
Linear	0.3 % of reference level

## Display average noise level (DANL)

	1 kHz RBW	10 Hz RBW	1 kHz w/preamp on	10 Hz w/preamp on, typical	1 Hz w/preamp on, typical
<b>E7402A</b>					
30 Hz to 9 kHz <sup>3</sup>	na	≤ -93	na	na	na
9 kHz to 100kHz <sup>3</sup>	na	≤ -109	na	na	na
100 kHz to 1 MHz <sup>3</sup>	na	≤ -135	na	na	na
1 MHz to 10 MHz <sup>3</sup>	≤ -117	≤ -136	na	≤ -152	≤ -162
10 MHz to 1 GHz	≤ -117	≤ -136	≤ -152 <sup>4</sup>	≤ -156	≤ -166
1 GHz to 2 GHz	≤ -116	≤ -135	≤ -153 <sup>4</sup>	≤ -156	≤ -166
2 GHz to 3 GHz	≤ -114	≤ -133	≤ -151 <sup>4</sup>	≤ -154	≤ -164
<b>E7405A</b>					
30 Hz to 9 kHz <sup>3</sup>	na	≤ -93	na	na	na
9 kHz to 100kHz <sup>3</sup>	na	≤ -109	na	na	na
100 kHz to 1 MHz <sup>3</sup>	na	≤ -135	na	na	na
1 MHz to 10 MHz <sup>3</sup>	≤ -117	≤ -137	na	≤ -155	≤ -165
10 MHz to 1 GHz	≤ -116	≤ -135	≤ -151 <sup>4</sup>	≤ -157	≤ -167
1 GHz to 2 GHz	≤ -116	≤ -131	≤ -151 <sup>4</sup>	≤ -155	≤ -165
2 GHz to 3 GHz	≤ -112	≤ -131	≤ -149 <sup>4</sup>	≤ -152	≤ -162
3 GHz to 6 GHz	≤ -112	≤ -131	na	na	na
6 GHz to 12 GHz	≤ -111	≤ -130	na	na	na
12 GHz to 22 GHz	≤ -107	≤ -126	na	na	na
22 GHz to 26.5 GHz	≤ -106	≤ -125	na	na	na

1. Characteristic

2. Mixer power level (dBm) = input power (dBm) – input attenuator (dB)

3. Typical

4. 0 to 50 dB for RBWs ≤ 300 Hz and span = 0 Hz, or when auto ranging is off, or 0 to 30 dB for RBW = 200 Hz.

5. 0 to -70 dB range when span = 0 Hz, when RBW = 200 Hz, or when IF gain is fixed.

Frequency response (10 dB input attenuation)	Reference level		
	Absolute <sup>1</sup>	Typical	Relative flatness <sup>2</sup>
30 Hz to 3 GHz <sup>3</sup>	±0.5 dB	na	±0.5 dB
3.0 GHz to 6.7 GHz	±1.5 dB	±0.39 dB	±1.3 dB
6.7 GHz to 13.2 GHz	±2.0 dB	±0.68 dB	±1.8 dB
13.2 GHz to 26.5 GHz	±2.0 dB	±0.86 dB	±1.8 dB

#### Input attenuation switching uncertainty at 50 MHz

Attenuation setting	Uncertainty
0 dB to 5 dB	±0.3 dB
10 dB	Reference
15 dB	±0.3 dB
20 to 65 dB	±(0.1 dB + 0.01 x attenuator setting)

#### Absolute amplitude accuracy Typical

Setting	Absolute accuracy	Typical
At reference settings <sup>4</sup>	±0.34 dB	±0.13 dB
Preamp on <sup>5</sup>	±0.37 dB	±0.14 dB
Overall amplitude accuracy <sup>6</sup>	±(0.54 dB + absolute frequency response)	

#### RF input VSWR<sup>3</sup> (at tuned frequency, 10 dB attenuation)

E7402A		
100 Hz to 100 kHz	1.1:1	
100 kHz to 3 GHz	1.4:1	
E7405A		
100 Hz to 100 kHz	1.1:1	
100 kHz to 6.7 GHz	1.3:1	
6.7 GHz to 13.2 GHz	1.5:1	
13.2 GHz to 22 GHz	2:1	
22 GHz to 26.5 GHz	2.2:1	

#### Resolution bandwidth switching uncertainty

(Referenced to 1 kHz RBW, at reference level)

10 Hz to 3 MHz RBW	±0.3 dB
5 MHz RBW	±0.6 dB
10 Hz to 300 Hz RBW	±0.3 dB

Range	-149 dBm to max. mixer level + attenuator setting
Resolution	
Log scale	±0.1 dB
Linear scale	±0.12% of reference level
Accuracy (reference level)	±0.3 dB (-10 dBm to -60 dBm)
-attenuator setting	±0.5 dB (-60 dBm to -85 dBm)
+ preamp gain)	±0.7 dB (-85 dBm to -90 dBm)

#### Display scale fidelity

Log maximum cumulative RBW ≥ 1 kHz		
dB below reference level	Typical	
0 dB (reference)	±0.00 dB	±0.00 dB
> 0 dB to 10 dB	±0.3 dB	±0.08 dB
> 10 dB to 20 dB	±0.4 dB	±0.09 dB
> 20 dB to 30 dB	±0.5 dB	±0.10 dB
> 30 dB to 40 dB	±0.6 dB	±0.23 dB
> 40 dB to 50 dB	±0.7 dB	±0.35 dB
> 50 dB to 60 dB	±0.7 dB	±0.35 dB
> 60 dB to 70 dB	±0.8 dB	±0.39 dB
> 70 dB to 80 dB	±0.8 dB	±0.46 dB
> 80 dB to 85 dB	±1.15 dB	±0.79 dB
RBW ≤ 300 Hz (span > 0 Hz)		
0 dB to 98 dB	±(0.3 dB + 0.01 x dB from reference level)	
≥ 98 dB to 120 dB	±(2.0 dB from reference level) <sup>3</sup>	
Log incremental accuracy		
0 dB to 80 dB <sup>7</sup>	±0.4 dB/4 dB from reference level	
Linear accuracy		
	± 2% of reference level	

#### Linear to log switching ±0.15 dB at reference level

1. Referenced to 50 MHz amplitude reference (20 °C to 30 °C)
2. Reference to midpoint between highest and lowest frequency response deviations. (20 °C to 30 °C)
3. Characteristic
4. Reference level -20 dBm; input attenuation 10 dB; center frequency 50 MHz; RBW 1 kHz; VBW 1 kHz; scale linear or log; span 2 kHz; sweep time coupled, sample director, signal at reference level.
5. 1 Hz to 300 Hz are only available in spans of ≤ 5 MHz and are not usable with tracking generator Option 1DN.
6. For reference levels 0 to 50 dBm; input attenuation 10 dB; dc coupled; RFW 1 kHz; VBW 1 kHz; scale loge range 0 to -50 dB from reference level; sweeptime coupled; signal input 0 to 50 dB; spsn ≤ 20 kHz.
7. 0 to 50 dB for RBWs ≤ 300 Hz and span = 0 Hz, or when auto ranging is off, or 0 to 30 dB for RBW = 200 Hz.

## Spurious responses

### Second harmonic distortion

10 MHz to 500 MHz	< -65 dBc for -30 dBm tone at input mixer <sup>1</sup>
500 MHz to 1.5 GHz	< -75 dBc for -30 dBm tone at input mixer <sup>2</sup>
1.5 GHz to 2.0 GHz	< -85 dBc for -10 dBm tone at input mixer <sup>2</sup>
> 2.0 GHz	< -100 dBc for -10 dBm tone at input mixer <sup>1</sup> (or below displayed average noise level)

### Third order intermodulation distortion

100 MHz to 6.7 GHz	< -85 dBc for two -30 dBm tones at input mixer <sup>1</sup> and > 50 kHz separation
> 6.7 GHz	< -75 dBc for two -30 dBm tones at input mixer <sup>1</sup> and > 50 kHz separation

### Other input related spurious

< -65 dBc, for -20 dBm tone at input mixer <sup>1</sup>

### Residual responses (input terminated and 0 dB attenuation)

150 kHz to 6.7 GHz < -90 dBm

### Amplitude ref. output

Amplitude -20 dBm (nominal)

### FM demodulation <sup>3</sup>

Input level -60 dBm + attenuator setting  
Signal level 0 to -30 dB below reference level

### Quasi-peak detector specifications

The EMC analyzer displays the quasi-peak amplitude of a pulse radio frequency on continuous wave signals. Amplitude response conforms with Publication 16 of Comité International Spécial des Perturbations Radioélectrique (CISPR) Section 1, Clause 2, as indicated in the relative quasi-peak response table.

1. Mixer power level (dBm) = input power (dBm) – input attenuator (dB)

2. Not available in RBW < 1kHz

3. Characteristic

4. Reference pulse amplitude accuracy relative a 66  $\mu$ V CW signal < 1.5 dB as specified in CISPR Pub 16 CISPR reference pulse: 0.44  $\mu$ Vs for 30 MHz to 1 GHz, 0.316  $\mu$ Vs for 150 kHz to 30 MHz, 13.5  $\mu$ Vs for 9 kHz to 150 kHz

5. Meets Class A performance during dc operation or serial number US41110000 or lower.

6. Characteristic; factory preset, fixed center frequency, sweep points = 101 auto align off, RBW = 1 MHz, stop frequency  $\leq$  3 GHz, span > 10 MHz and  $\leq$  600 MHz.

7. Characteristic; factory preset, fixed center frequency, sweep points = 101 auto align off, RBW = 1 MHz, stop frequency  $\leq$  3 GHz, span = 20 MHz, GPIB interface, display and markers off, fixed center frequency, single sweep

8. Characteristic; includes center frequency tuning and measurement plus GPIB transfer times, stop frequency  $\leq$  3 GHz, sweep points = 101, display and markers off, single sweep

9. When storing a 401-point trace plus the instrument state

## Relative quasi-peak response to a CISPR pulse (dB)

Pulse repetition frequency (Hz)	120 kHz EMI BW .03 to 1 GHz	9 kHz EMI BW 0.150 to 30 MHz	200 Hz EMI BW 9 kHz to 150 kHz
1000	+8.0 $\pm$ 1.0	+4.5 $\pm$ 1.0	—
100	0 dB reference <sup>4</sup>	0 dB reference <sup>4</sup>	+4.0 $\pm$ 1.0
60	—	—	+3.0 $\pm$ 1.0
25	—	—	0 dB reference <sup>4</sup>
20	-9.0 $\pm$ 1.0	-6.5 $\pm$ 1.0	—
10	-14 $\pm$ 1.5	-10.0 $\pm$ 1.5	-4.0 $\pm$ 1.0
5	—	—	-7.5 $\pm$ 1.5
2	-26 $\pm$ 2.0	-20.5 $\pm$ 2.0	-13.0 $\pm$ 2.0
1	—	-22.5 $\pm$ 2.0	-17.0 $\pm$ 2.0
Isolated pulse	—	-23.5 $\pm$ 2.0	-19.0 $\pm$ 2.0

## General specifications

### Temperature range

Operating 0° C to +55° C  
Storage -40° C to +75° C

### EMI compatibility

Conducted and radiated emissions is in compliance with CISPR Pub. 11/1990 Group 1 Class B<sup>5</sup>

### Audible noise

< 40 dBa pressure and < 4.6 Bels power (ISODP7779)

### Military specification

Type tested to the environmental specifications of MIL-PRF-28800F, class 3

### Power requirements

ON (line1) 90 to 132 V rms, 47 to 440 Hz  
195 to 250 V rms, 47 to 66 Hz  
Power consumption < 300 W  
Standby (line 0) Power consumption < 5 W  
DC operation  
Voltage 12 to 20 Vdc  
Power consumption < 200 W

### Measurement speed

	E7402A	E7405A
Local measurement rate <sup>6</sup>	$\geq$ 45/sec	$\geq$ 40/sec
Remote measurement as GPIB transfer rate <sup>7</sup>	$\geq$ 45/sec	$\geq$ 40/sec
RF center frequency tuning time <sup>8</sup>	$\geq$ 75/ms	$\geq$ 75/ms

### Data storage (nominal)

Internal 200 traces <sup>9</sup> or states  
External (floppy) 200 traces <sup>9</sup> or states

**Weight** (without options)

E7402A	14.9 kg	(32.9 lbs.)
E7405A	17.1 kg	(37.7 lbs.)

**Dimensions**

Without handle	222 mm(H) x 409 mm(D) x 373 mm(W)
With handle (max.)	222 mm(H) x 516 mm(D) x 416 mm(W)

**Inputs/outputs****Front panel connectors**

Input	50 $\Omega$ type N (f)
RF Out	50 $\Omega$ type N (f)

**Probe power** +15 Vdc, -12.6 Vdc at 150 mA max. characteristic

**Ext. keyboard** 6-pin mini-DIN, PC keyboards (for entering screen titles and file names)

**Speaker** front-panel knob controls volume

**Headphone** 3.5 mm ( $\frac{1}{8}$  inch) miniature audio jack  
Power output 0.2 W into 4  $\Omega$ <sup>1</sup>

**Amptd ref. output** 50  $\Omega$ , BNC (f)

**Rear panel connectors**

**10 MHz ref out** 50  $\Omega$ , BNC (f), > 0 dBm<sup>1</sup>

**10 MHz ref in** 50  $\Omega$ , BNC (f), -15 to +10 dBm<sup>1</sup>

**Gate trig/ext. trig in** BNC (f), 5 V TTL

**Gate hi swp out** BNC (f), 5 V TTL

**VGA output** VGA compatible monitor, 15-pin D-SUB, (31.5 kHz horizontal, 60 Hz vertical sync rates, non-interlaced) Analog RGB 640 x 480

**IF and sweep ports**

Aux IF output	BNC (f), 21.4 MHz, nominal -10 to -70 dBm <sup>1</sup> (uncorrected)
Aux video out	BNC (f), 0 to 1 V <sup>1</sup> (uncorrected)
Hi swp In	BNC (f), low stops sweep (5 V TTL)
Hi swp out	BNC (f), (5 V TTL)
Swp out	BNC (f), 0 to +10 V <sup>1</sup> ramp

**GPIO interface**

Standard (Option A4H) IEEE-488 bus connector

**Serial interface**

(Option 1AX) RS-232, 9-pin D-SUB (m)

**Parallel interface**

Standard 25-pin D-SUB (f), printer port only

<sup>1</sup>. Characteristic

## Option specifications

### Option 1DN tracking generator

**Frequency range** 9 kHz to 3.0 GHz

#### Output power level range

Range -2 to -66 dBm

Resolution 0.1 dB

Absolute accuracy  $\pm 0.75$  dB  
(at 50 MHz)

**Output vernier range** 8 dB

**Output attenuator range** 0 to 56 dB, 8 dB steps

#### Output flatness

9 kHz to 10 MHz  $\pm 3.0$  dB

10 MHz to 3.0 GHz  $\pm 2.0$  dB

#### Effective source match (characteristic)

0 dB attenuation < 2.0:1 (0 dB attenuation)

$\geq 8$  dB attenuation < 1.5:1 ( $\geq 8$  dB attenuation)

#### Spurious output

Harmonic spurs (-1 dBm output)

9 kHz to 3 GHz < -25 dBc

Non-harmonic spurs

9 kHz to 2 GHz < -27 dBc

2 GHz to 3 GHz < -23 dBc

**Dynamic range** Maximum output power –  
displayed average noise level

**Power sweep range** (-10 dBm to -1 dBm) –  
(source attenuator setting)

**Preamplifier (standard)** 1 MHz to 3 GHz  
(nominal gain 20 dB)



## Agilent EMC Analyzers

**E7401A** 9 kHz to 1.5 GHz

**E7402A** 9 kHz to 3.0 GHz

**E7403A** 9 kHz to 6.7 GHz

**E7404A** 9 kHz to 13.2 GHz

**E7405A** 9 kHz to 26.5 GHz

### Includes:

**1DS** RF Preamplifier (20 dB gain, 100 kHz to 3.0 GHz)

**1DR** Narrow resolution bandwidths

**UTA** Floppy disk drive

**A4H** GPIB/Parallel port

### Options:

**1AX** Replaces GPIB with RS-232

**1D5** Adds high stability time base

**1D6** Time gated sweep

**1DN** Adds tracking generator<sup>1</sup>

**A4J** Adds IF and sweep ports

**A5D** Adds 12 Vdc power cable

**AXT** Adds transit case

**AYT** Adds grey soft carrying case

**AYU** Adds yellow soft carrying case

**AYX** Adds fast time domain sweep

**BAB** Replaces type "N" connector with APC 3.5 connector

**UK6** Commercial calibration certificate

**UK9** Front panel cover

## Agilent E7415A EMI Measurement Software

### Includes:

- Asset control module for E7400 A-series EMC analyzers
- Report generation capability

### Options

**001** Report generation only

**101** Replaces E7400 A-series ACM with 8590EM series ACM

**102** Replaces E7400 A-series ACM with 8546A/42E ACM

## E7416A EMI Measurement Software Upgrade

**001** Adds report generation

**101** Adds ACM for 8590EM series

**102** Adds ACM for 8546A/42E EMI receivers

## Additional EMC Accessories Available

**11966C** Biconical antenna (individually calibrated)

**11966D** Log periodic antenna, 200 MHz to 1 GHz (individually calibrated)

**11966E** Ridged horn antenna (1 to 18 GHz)

**11966N** Log periodic antenna (0.2 to 5 GHz)

**11967E** LISN, 25 amp with choice of NEMA, SCHUKO, British, or Australian power connectors.

1. 9 kHz to 1.5 GHz when ordered with the E7401A; 9 kHz to 3.0 GHz when ordered with the E7402A, E7403A, E7404A, and E7405A