




CBA 1G-070B 1 MHZ TO 1 GHZ 70 W BROADBAND POWER AMPLIFIER



- **■** Compact Design
- Touch Screen Color display
- Input over-drive protection
- USB, Ethernet, GPIB, RS232 and TTL interface
- Gain Control
- Three year warranty

New, high power density, design has allowed us to produce a 70 W 1 MHz to 1 GHz amplifier in a compact 3U package. With a minimum of 55 W of linear power this amplifier is ideal for RF immunity testing in a GTEM and for 3V/m testing with a wide range of available antenna. These amplifiers are easily integrated with the Teseq immunity instruments such as the NSG4070 or ITS 6006 and Teseq GTEM cells to create turnkey IEC61000-4-3 test systems. The new touch screen colour display gives an immediate visual indication of forward and reverse power along with the current operating status of the amplifier and access to diagnostic information such as gate current and heatsink temperature.

Fan speed adjusts depending on the heatsink temperature thus ensuring the minimum audio noise level possible in the operating environ-ment. The inbuilt calibrated directional coupler provides a quick and easy way to monitor forward and reflected power with any power meter. Input over-drive protection prevents damage to the input devices due to accidental high input power. Multiple remote inter-faces are available as standard including USB, GPIB, RS232 & Ethernet. Amplifier gain can be controlled either remotely through one of the available interfaces or via the front panel touch screen.

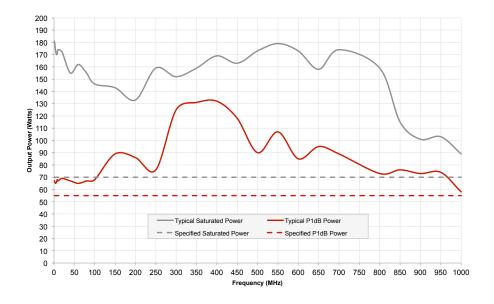





CBA 1G-070B 1 MHZ TO 1 GHZ 70 W BROADBAND POWER AMPLIFIER



| Key Parameters | Minimum | Maximum | Nominal |
|-----------------|---------|---------|---------|
| Frequency | 1 MHz | 1 GHz | |
| Saturated Power | 70 W | | 120 W |
| Power at P1 dB | 55 W | | 70 W |
| Gain | 49 dB | 53 dB | 51 dB |
| Gain Flatness | | +/-2 dB | |

| Additional RF Data | |
|--|------------------------|
| Harmonics at 55 W | -20 dBc |
| Maximum Input without Damage | +20 dBm |
| Spurious | -50 dBc |
| Stability | Unconditionally stable |
| Load VSWR without damage (All Phase Angles) | Infinite |
| Load VSWR without foldback (All Phase AWngles) | 4:1 |
| RF Input | Type N (socket) |
| RF Output | Type N (socket) |
| Gain Control | 0-30 dB in 255 steps |

| Impedance/VSWR | |
|------------------|------|
| Output Impedance | 50 Ω |
| Input VSWR | 2:1 |
| Output VSWR | 2:1 |

| Interfaces and Electrical | |
|---------------------------|---|
| Interface | Touch screen, GPIB, RS232, Eththernet, & USB |
| Safety Interlock | BNC Connector, Open for Standby |
| Supply Voltage | 90-264 VAC |
| Supply Frequency | 47-63 Hz |
| Supply Power Requirement | <0.4 kVA |

| Physical and Environmental | |
|----------------------------|-------------------------------------|
| Dimensions | 3U, 19 Inch Rack width, 610 mm deep |
| Weight | 16 kg |
| Temperature Operational | 0°C-40°C |
| Temperature Non Operating | -40°C-85°C |
| Humidity (Non Condensing) | 95% |

CONTACT US!

We're there where you need us. See details on the last page.





CBA 1G-070B 1 MHZ TO 1 GHZ 70 W BROADBAND POWER AMPLIFIER



| Options: To be specified at time of ordering | | |
|--|----------------|--|
| Rear Panel RF Connectors | CBA 1G-070B-10 | |
| Front Panel RF Connectors | CBA 1G-070B | |

CONTACT US!

We're there where you need us. See details on the last page.

