




## SPECIFICATIONS

<b>General</b>	The PIM Shield Multi-Function Snap-in Adapter provides a low passive intermodulation method to support one stack of snap-in style cable hangers in high-risk PIM zones.
<b>Mounting</b>	Secure the Snap-in Adapter to existing round or angle member using PIM Shield Cable Strap (900443-16-50 or 900443-27-25) or equivalent.
<b>Round Member Attachment</b>	2.37-inch minimum outside diameter
<b>Angle Member Attachment</b>	0.25-inch maximum angle flange thickness
<b>System PIM Performance</b>	IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus.
<b>Material</b>	UV Stable, glass filled Nylon
<b>Operating Temperature</b>	-40°C to +70°C
<b>Case Dimensions</b>	12.5-inch x 9.5-inch x 7-inch
<b>Case Weight</b>	7.1 Lbs.
<b>Qty. Per Case</b>	10

1X SNAP-IN LAUNCH

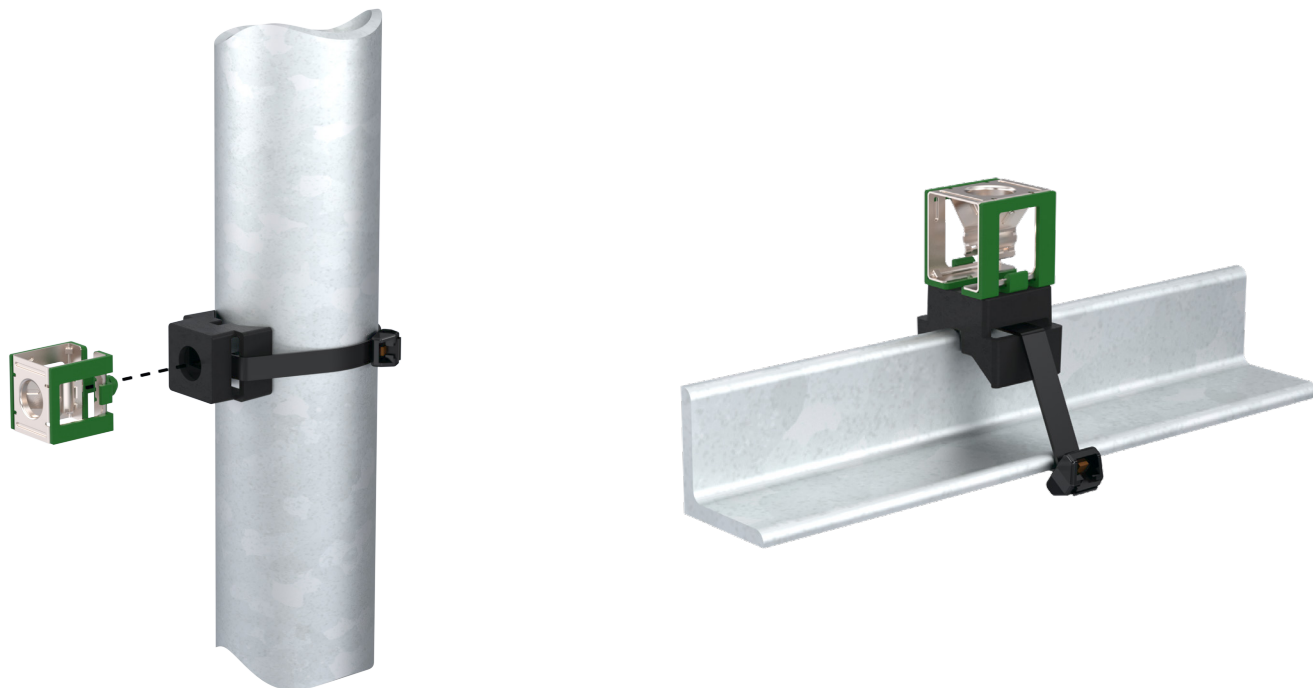

Patent Pending design allows secure attachment to round or angle members at cell sites.

