

Features

Frequency range of 150 kHz to 30 MHz

Fully compliant with CISPR 16-1-2 / ANSI C63.4

“Air-core” inductors to prevent saturation

Built-in Transient Limiter

Individual Calibration Included

Three-Year Warranty

Description

The LIN-120A Line Impedance Stabilization Network (LISN) provides the necessary measurement platform for performing power line conducted emissions compliance testing as required by most worldwide standards for commercial products. The LIN-120A is compliant with both CISPR 16-1-2 and ANSI C63.4.

The LISN provides defined stable impedance and isolates the EUT from power source influences, thereby providing accurate and repeatable results.

The LIN-120A includes one pair of single-conductor networks, housed together, to be installed in series with each current-carrying conductor in a single-phase, dual-phase or DC power system. A second LIN-120A pair can be used to accommodate 3-phase power systems (Wye or Delta configurations).

The LIN-120A is equipped with IEC C20 connector at the mains (power input) and Universal multi-configuration 20 Amps at EUT (power output) ports.

This LISN uses air-core inductors to prevent saturation and permeability variation. The mounting plate of the LIN-120A is left unpainted in order to facilitate connection to earth ground in its installation, which is essential due to high leakage current.



Transient Protection


The LIN-120A has a built in transient limiter for impedance matching, reduction of out-of-band emissions and transient protection for your measurement instrument.

Calibration


All LIN-120A LISNs are individually calibrated in compliance with the relevant requirements of CISPR 16-1-2 and ANSI C63.4. Impedance, Phase, Isolation, and Insertion Loss data is supplied with each unit, along with the calibration certificate.

Typical Connection Diagrams

Single Phase connection with one set of LISN

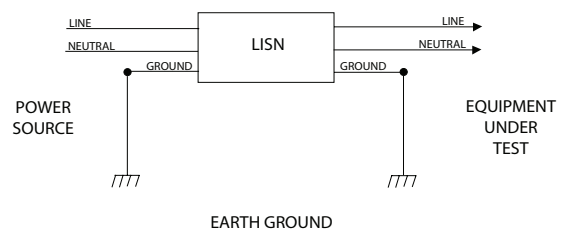

Three Phase connection with two sets of LISNs

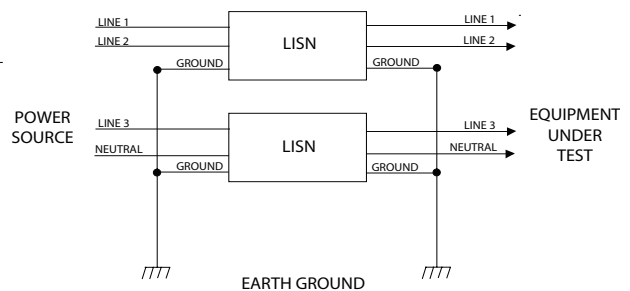

Application

Product Name	Line Impedance Stabilization Network (LISN)
Specification	CISPR 16-1-2 / ANSI C63.4
Application	Power line conducted emissions tests
Frequency Range	150 kHz to 30 MHz
RF Connector	50Ω N-type (female)
Current Rating	20 Amperes _(AC) , 14 Amperes _(DC)
Voltage Rating	270 VAC (Line to Ground), 380 VDC
Inductors	50 μH (air-core)
Mains & EUT Connections	IEC 60320, C-20 @Mains and Universal multi-configuration @ EUT
Dimensions (each network)	14 x 13 x 6.5 inches / 35.5 x 33 x 16.5 cm
Weight (each network)	10.5 lbs / 4.76 kg
Insertion Loss	< 0.5 dB (150 kHz to 30 MHz)
Isolation	> 40 dB (150 kHz to 30 MHz)

All specifications are subject to change without notice.
All values are typical, unless specified.

