

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-570 Double Ridge Guide Horn Antenna 170 MHz – 3 GHz

High gain, low VSWR, input handling capability up to 800 watts CW, and rugged design make this horn antenna excellent for both immunity and emissions testing.



 $\begin{array}{rl} & \mbox{Frequency Range:} & 170 \ \mbox{MHz} - 3 \ \mbox{GHz} \\ & \mbox{Antenna Factor} (1 \ \mbox{Meter}): & 11 \ \mbox{to} 33 \\ & \mbox{Gain} (dBi): & 0 \ \mbox{to} 10.9 \\ & \mbox{Maximum Continuous Power:} & 800 \ \mbox{Watts} \\ & \mbox{Impedance:} & 50 \ \mbox{\Omega} \\ & \mbox{Max Radiated Field:} & 200 \ \mbox{V/m} \\ & \mbox{So0 V/m} (with \ \mbox{Optional} \\ & \mbox{7/16 DIN female connector}) \\ & \mbox{Connector:} & \mbox{N-Type, female} \\ & \mbox{Mounting Base:} & \mbox{14} - 20 \ \mbox{Thread, female} \\ \end{array}$

Features


- Broad Frequency Range of 170 MHz to 3 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated (1, 3 & 10 Meter calibration included,
- horizontal polarization)
- Optional 7/16 Input connector available for increased power capability
- Three year Warranty

The A.H. Systems' Double Ridged Guide Horn is a broadband antenna that offers excellent performance over the frequency range of 170 MHz - 3 GHz. High gain, low VSWR, input handling capability up to 800 watts CW and rugged design make this horn antenna excellent for both immunity and emissions testing.

Recommended Accessories

- ATU-510 (Antenna Tripod)
- AEH-511 (Azimuth and Elevation Head)



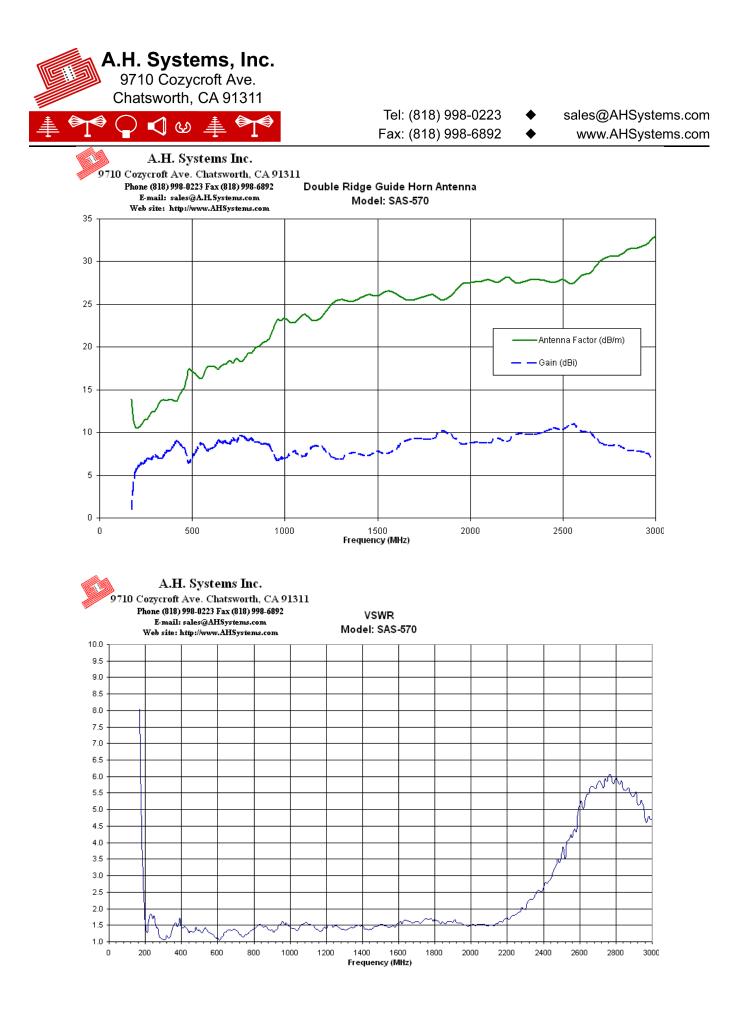





Tel: (818) 998-0223

Fax: (818) 998-6892

٠

sales@AHSystems.com www.AHSystems.com



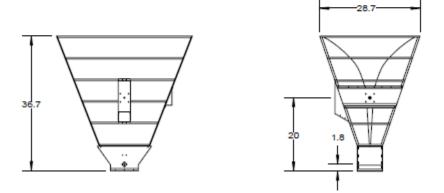

Physical Dimensions:

Length:36.7 in. (93.2 cm) Width:28.7 in. (72.9 cm) Height:38.5 in. (97.8 cm) Weight:22.5 lb.'s (10.21 kg)

Aperture:27.2" x 37.2" (69cm x 94.5cm)